

# YAMAHA TW200 TAIL RACK HTP9-3-6



*Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail [installation@happy-trail.com](mailto:installation@happy-trail.com).*


Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts in these instructions. If any parts or hardware are missing, contact us immediately at the number listed above.


## **IMPORTANT!!!!**

When installing Happy Trails racks, leave all bolt connections loose until the entire product is installed. Then go back and tighten all connections. We recommend the use of thread locking compound.

## **Installation**

Remove the seat. Mount the rear rack to the two fender bolts under the seat using the original bolts. Remove the turn signals, being careful to not damage the wires. Install the two turn signal relocation tabs so that they bend in towards the tail light. Mount them between the tail rack mounting spud and the frame as shown in the photo. Install the turn signals and route the wires along the tabs.

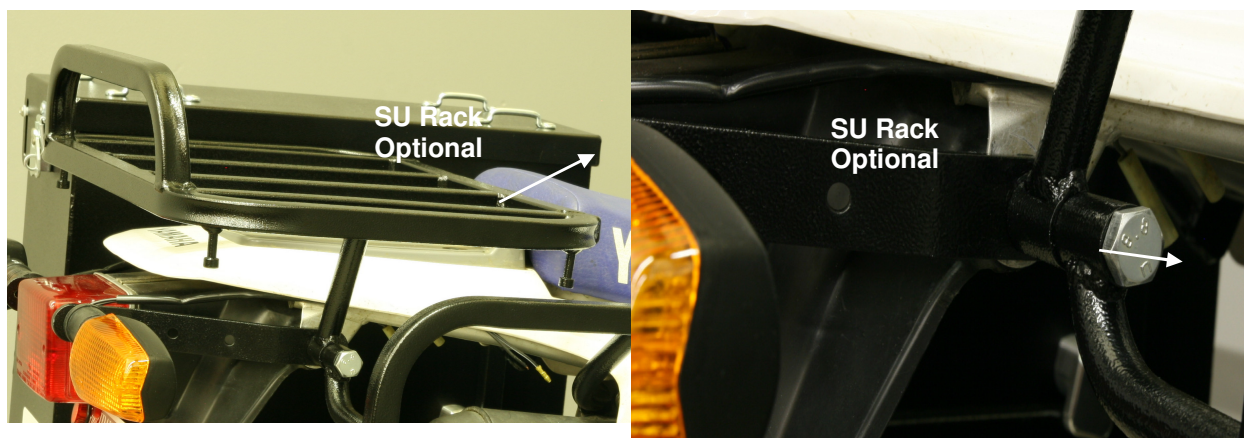

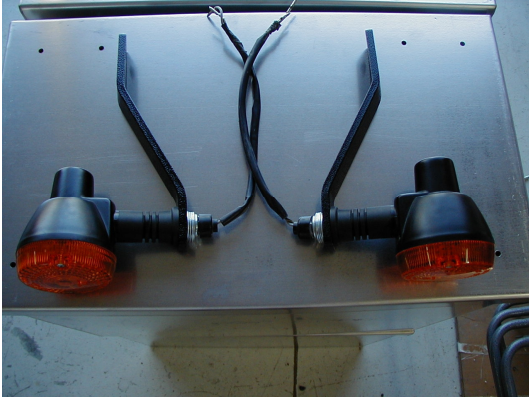

### **Turn signal installation**

The photo at the left shows how the turn signals are mounted to the tabs and how they bend in towards the tail light. Route the wiring so it is secure.

### **Bolt List:**

- 2 M10x55mm HHCS Rear arm of tail rack mount
- 2 10mm Nuts For the M10 bolts above
- 2 KLR turn signal tabs
- 2 Wire extensions
- 2 M6x30mm SHCS
- 4 1/4" Washer
- 2 M6 Nylock

***All other mount points use existing hardware.***