



Installation Instructions for Mustang Two-Piece Seat on 2008-2011 Yamaha Raider

Removal of stock seat

1. Use ignition key to unlatch front of driver's seat. Pull front of seat up and pull seat forward to disengage it from the fender bracket.



2. Remove the two bolts at the front of the rear seat.




3. Then pull rear seat forward and off of its fender bracket.



4. In preparation for installation of Mustang seat, locate all four mounting points:

- a. Opening for front seat latch
- b. Bracket for rear of front seat
- c. Bracket for front of rear seat
- d. Bracket for rear of rear seat

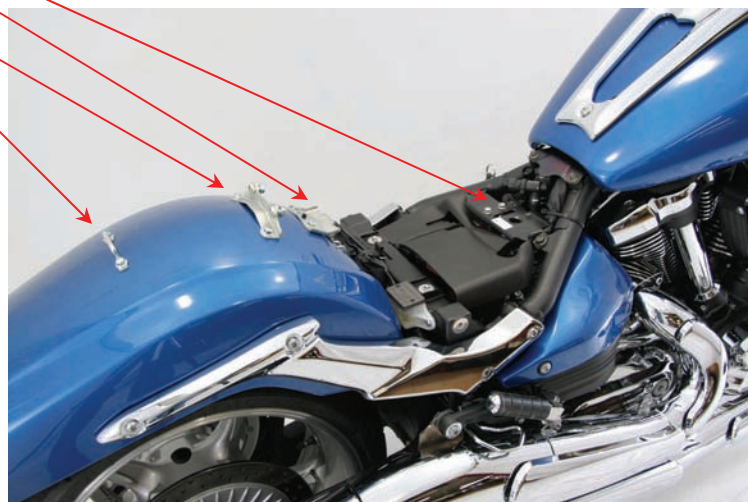

Installation Instructions for Mustang Two-Piece Seat on 2008-2011 Yamaha Raider

Installation of Mustang seat

1. Begin with rear seat. Push back end of rear seat onto fender bracket.



2. Align and install two bolts to secure front of rear seat to fender bracket.



3. Tilt front of driver's seat up and push rear of seat onto fender bracket. Then align front bracket with slot for latch and push front of seat down firmly to engage latch.



Enjoy the comfort and good looks of your new Mustang seat.

These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref. part #'s 76260, 76261, 79550, 79551