

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

Ducati Monster 937 Slip-on Exhaust



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

WDMON7


Ducati Monster 937 Slip-on Exhaust

(800)736-2114

WerkesUSA

Page 2

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

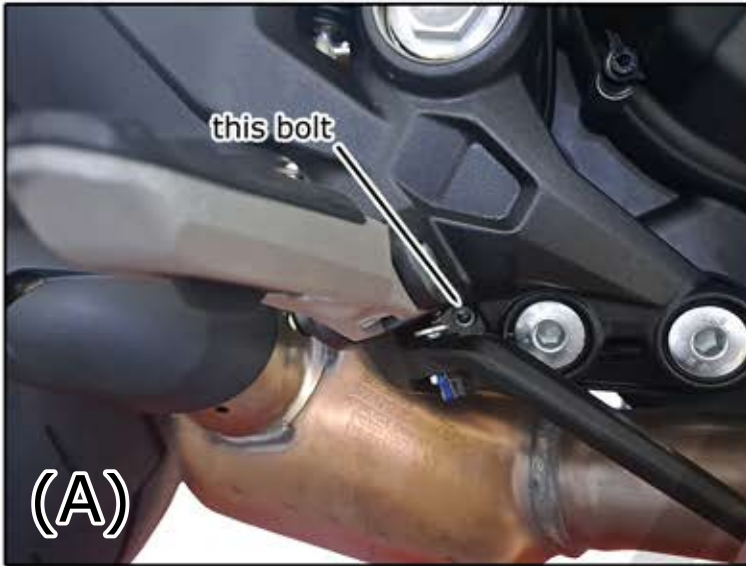

REMOVAL:

- 1) Remove right side chamber bolt (located below and behind the rear brake pedal) *FIG (A)
- 2) Remove left side chamber bolt. *FIG (B)
- 3) Remove both the upper and lower clamps.
- 4) Remove upper exhaust bolt. *FIG (C)
- 5) Lower the stock exhaust and set aside.

INSTALL:

- 1) Slip Mid-pipe onto Y-pipe. Make sure to align spring hooks.
- 2) Slip new GP Canister onto Y-pipe. Using the heat shield nuts as reference for alignment.
- 3) Position entire exhaust assembly and slide both exhaust inlets onto stock head pipes.
- 4) Secure GP Canister using supplied 8mm nut and bolt.
- 5) Secure Y-pipe with 6mm nut, washer, & bolt.
- 6) Install supplied Spring and both clamps.
- 7) Install Heat Shield using 2 supplied bolts.
- 8) Clean exhaust of fingerprints using WD-40 (or similar) before starting engine.

WDMON7