



## Mounting Suggestions:

Honda VT750C2 Spirit (Shaft) 2007-up

### Two-Piece Seat

**Baseplate Features:** The two-piece, marine-grade fiberglass baseplate is a direct replacement for the stock seat. Rubber bumpers are strategically placed to prevent the seat from touching the frame and fender.



#### Removal of stock seat:

1. Locate and remove two side mount screws. Metric Allen wrench needed.
2. Locate and remove single rear fender bolt. Metric wrench needed.
3. Lift seat off of bike.

#### Installation of Mustang Two-Piece seat:

1. Insert front tongue of rear seat into slot on back of front seat to create a one-piece seat unit.




2. Slide the front nose tab under gas tank.

3. Push seat forward until two side mount brackets are properly aligned.
4. Install two side mount screws, but do not tighten at this time.



## Mounting Suggestions: Honda VT750C2 Spirit (Shaft) 2007-up Two-Piece Seat

5. Push rear seat forward until the rear mounting tab aligns with fender screw hole.
6. Install and tighten stock rear fender bolt. Metric wrench needed.
7. Tighten two side mount screws. Metric Allen wrench needed.

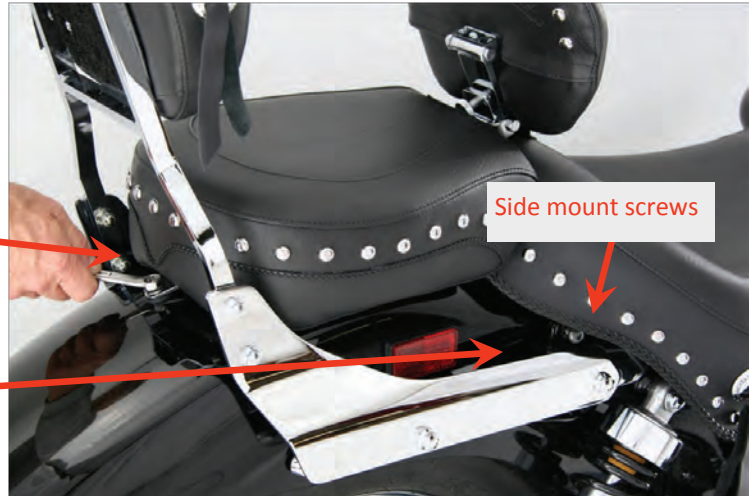

Enjoy the comfort of your new Mustang seat!



These steps are guidelines to help you install your new Mustang Product. If you need further assistance, please call us at 800-243-1392 or 860-582-9633, Monday through Friday 9:00 – 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

Refers to part numbers 76161, 76160, 79470, 79471