



PUSH BUTTON FUEL DOOR LATCH 1467

FITS: '92 & UP H-D ELECTRA/TOUR/ROAD/STREET GLIDES

PARTS INCLUDED

- 1 Push button latch
- 1 Hardware kit including:
  - 1 Hinge Mount Clip (Early Model)
  - 1 Hinge Mount Clip (Late Model)
  - 1 Hex Nut / Steel / Zinc Plated
  - 2 8/32" X 1/4" Slotted HHCS, Steel, Zinc
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.


TOOLS SUGGESTED

Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

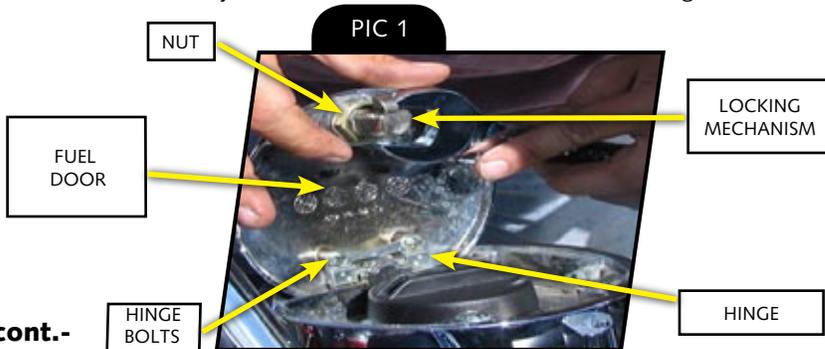

CUSTOMER SERVICE  
877.370.3604 (toll free)

INSTALLATION QUESTIONS  
techsupport@kuryakyn.com  
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.




**STEP 2** Open the fuel door and remove the gas cap. Place a clean dry rag into the filler hole to prevent small parts from falling into the fuel tank.

**STEP 3** Locate the nut on the bottom of the locking mechanism. Remove the nut with a combination wrench (be sure to support the cover when removing the nut) and remove the lock from the fuel door.

**STEP 4** Locate the hinge and remove the two screws, the fuel door, and the hinge. (make note of the position of the hinge before removing)

**STEP 5** Find the two hinges in the kit. Determine which hinge is specific to the year of your motorcycle by looking at the circled portion of the hinge from pic 2.

**STEP 6** With the screws supplied in the kit reinstall the fuel door and the new hinge in the reverse order that they were removed. (do not over tighten screws)

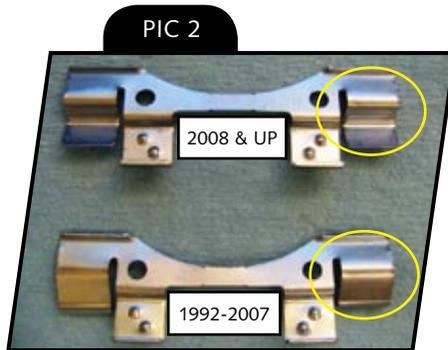

**STEP 7** Install the push button latch into the top of the fuel door then tighten the nut from the bottom. (make sure to support the cover when tightening the nut)

**STEP 8** Now that everything is assembled check the operation of the fuel door latch.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

*Ride On!*

**Kuryakyn**<sup>®</sup>

**PAGE**  
**2**

**PUSH BUTTON FUEL DOOR LATCH**

**INSTALLATION**