



# INSTALLATION

## DELUXE INNER PRIMARY COVER

## 8299

### PARTS INCLUDED

- 1 Chrome Inner Primary Cover
- 1 Hardware Kit Including:
  - 2 "L" Bracket
  - 1 "Z" Bracket
  - 4 #6-32 x 1/4" Slotted Pan Head Screw
  - 1 1/4"-20 x 1/2" Socket Head Cap Screw — Chrome
  - 1 1/4" Hi-Collar Lock Washer — Chrome
  - 1 1/4" I.D. Flat Washer, Chrome
  - 1 5/16"-18 x 1 3/4" Hex Head Cap Screw — Chrome
  - 1 5/16" Special Trimmed Flat Washer — Steel
  - 1 5/16" I.D. x 7/8" O.D. x 1/4" Thick Spacer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Set of Hex Wrenches, Socket set and Ratchet, Flat Blade Screwdriver, Torque Wrench—in/lbs and ft/lbs

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

**NOTE:** Not compatible with lowering kits or crossover dual exhaust (one pipe on each side).

**WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge.

Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025.

Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

-cont.-

8299-23HD-0212

kuryakyn.com






**STEP 2** Fasten the "L" Brackets to the chrome cover using the four #6-32 x 1/4" slotted pan head screws as shown in PIC.1. Then affix the "Z" bracket to the chrome cover using the 1/4"-20 x 1/2" socket head cap screw, lock and flat washer as shown on the right hand side of PIC.2 and a close-up of the finished installation in PIC.3.

**STEP 3** Remove the four fasteners from the primary cover. PIC 4

**STEP 4** Place the chrome cover on the inner primary and secure with the three socket head cap screws removed in Step 3.  
**Torque to 108 in/lbs.**

**STEP 5** Observe the slot at the front of the cover. If a gap exists between the cover and the inner chain case housing then place the supplied spacer in this location. PIC 2 Whether the spacer is used or not, secure with the supplied chrome 5/16"-18 x 1 3/4" hex head cap screw and special flat sided chrome washer.  
**Torque to 26 ft/lbs.** Finished installation see PIC.4.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

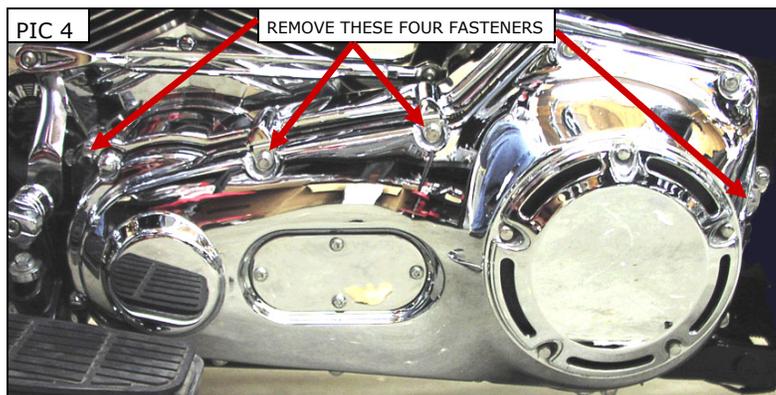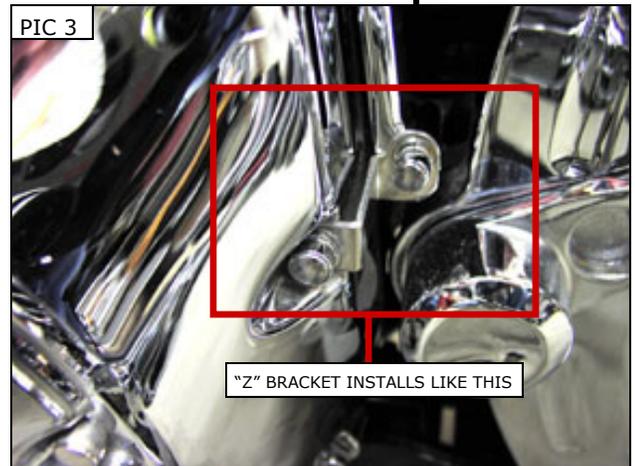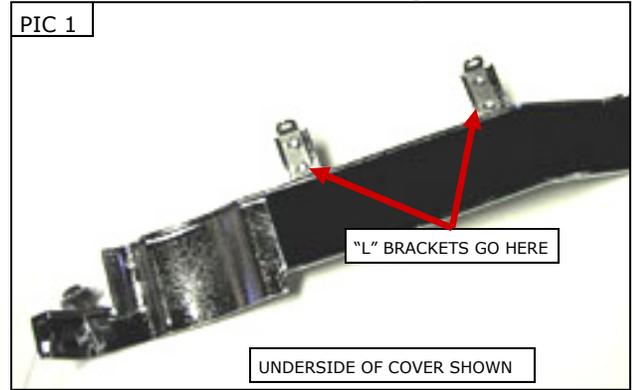

*Ride On!*