




FITTING INSTRUCTIONS FOR TP0003 FOOTBOARD SLIDERS
YAMAHA T-MAX



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

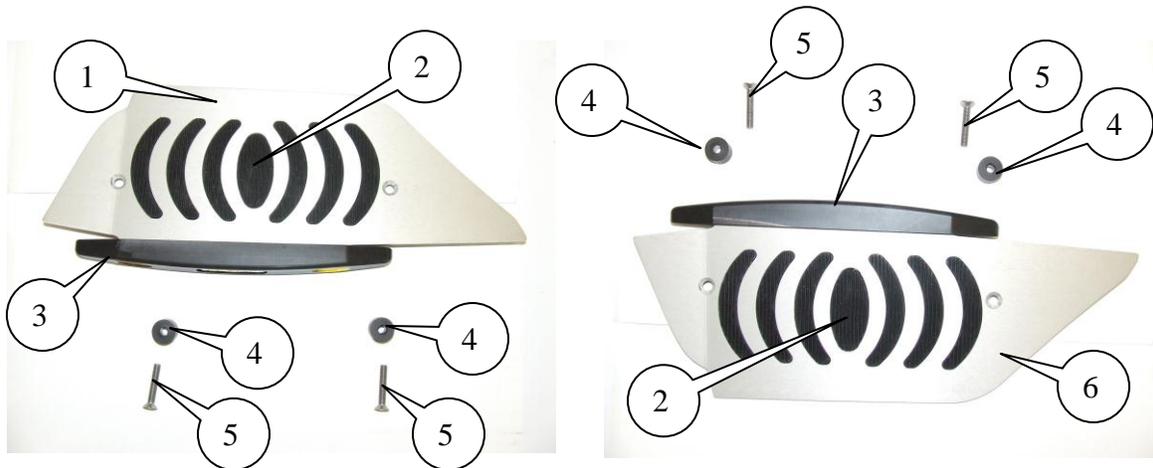




LEGEND

- ITEM 1 = MOUNTING PLATE LEFT-HAND SIDE (MP0004) (x1).
- ITEM 2 = RUBBER MAT (RG0016) ONE PER SIDE (x2).
- ITEM 3 = SLIDER (SL0007) ONE PER SIDE (x2).
- ITEM 4 = SPACERS (S0383) TWO PER SIDE (x4).
- ITEM 5 = M6x35mm LONG COUNTER-SUNK BOLTS (TWO PER SIDE) (x4).
- ITEM 6 = MOUNTING PLATE RIGHT-HAND SIDE (MP0005) (x1).


Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- Set of metric Allen keys to include 4mm A/F sizes.
- 10mm Socket and wrench.

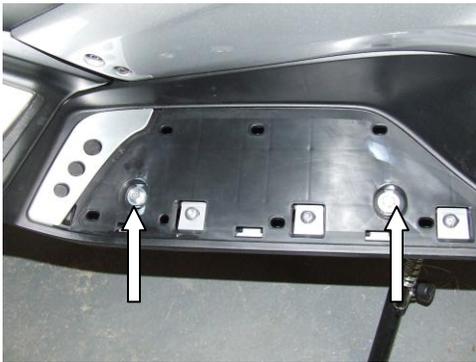

PICTURE 1

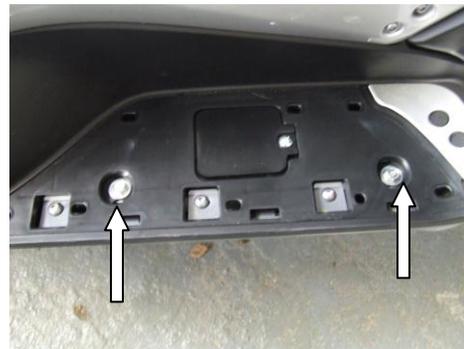

PICTURE 2

FITTING INSTRUCTIONS

- REMOVE ORIGINAL RUBBER FOOT PLATE (LIFT CORNER AND GENTLY PULL).
- USING 10mm SOCKET UNDO AND REMOVE THE FOUR BOLTS ARROWED IN PICTURES 1 AND 2.
- PLACE ONE SPACER INTO EACH OF THE RECESSES OF REMOVED BOLTS.
- POSITION NEW TREAD PLATES AS SHOWN IN TOP PICTURES.
- USING THE COUNTER-SUNK BOLTS FROM KIT SECURE THE TREAD PLATES INTO POSITION.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



FRANCE
INSTRUCTIONS DE MONTAGE
TP0003
YAMAHA T-MAX

Le sens de montage n'est pas identique au sens présenté dans l'emballage, merci de suivre les instructions ci dessous.


Dans le cas où les kits sont emballés avec un joint torique, celui-ci doit être retiré avant le montage.

LEGENDE

- Art 1 = Plaque côté gauche (MP0004) (x1).
- Art 2 = Pièce en caoutchouc (RG0016) (x2).
- Art 3 = Protection SLIDER (SL0007) (x2).
- Art 4 = Entretoise (S0383) (x4).
- Art 5 = vis de fixation M6x35mm (x4).
- Art 6 = Plaque côté droit (MP0005) (x1).

Outils nécessaires

- Jeu de clé Allen, incluant la clé de 4 mm.
 - Clé à douille de 10mm.

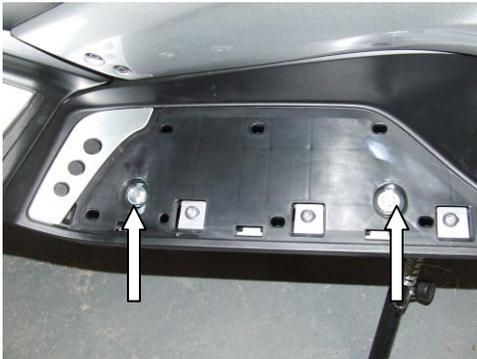

PICTURE 1



PICTURE 2

INSTRUCTIONS

- Enlever les tabliers repose pied en caoutchouc. (soulever le coin et tirer délicatement).
- A l'aide de la clé de 10 mm, enlever les 4 vis de fixation (vis montrées sur les photos ci dessus).
- Placer les entretoises fournies dans le kit dans les trous de fixation à la place des vis.
- Placer les plaques R&G sur le véhicule (voir les photos en haut de la page).
- Fixer les plaques sur le scooter à l'aide des 4 vis livrées dans le kit.