




FITTING INSTRUCTIONS FOR SP0044 SWINGARM-PROTECTORS
HUSQVARNA TR650 STRADA 2012



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

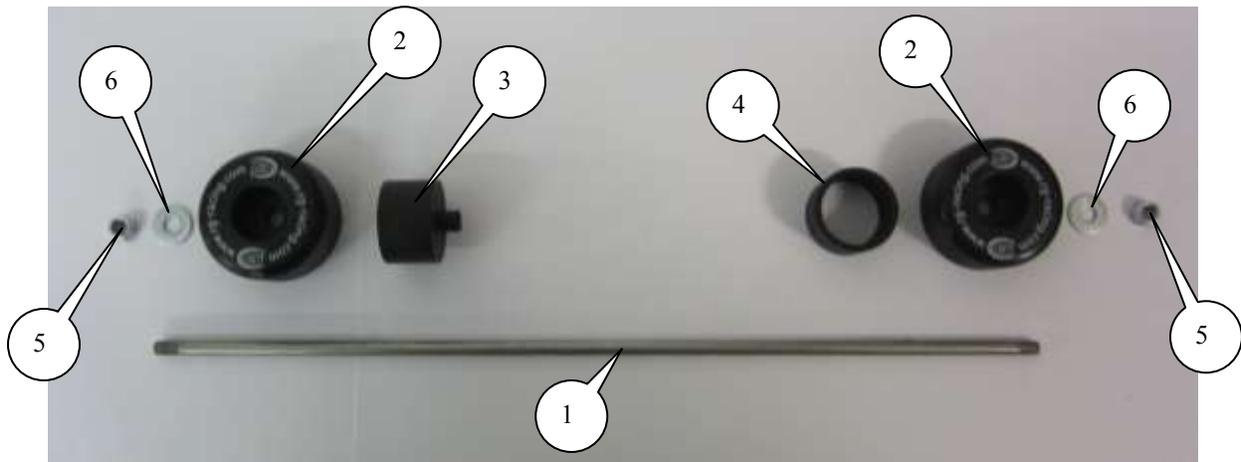

LEGEND

- ITEM 1 = SPINDLE BAR (SB096 APPROX 350mm LONG) (x1)
- ITEM 2 = CRASH PROTECTORS (B0442 M6 (6mm INTERNAL DIAMETER)) (x2).
- ITEM 3 = LEFT-HAND SPACER (S0561, 6mm INTERNAL DIAMETER) (x1).
- ITEM 4 = RIGHT-HAND SPACER (S0562, TUBE TYPE SPACER) (x1).
- ITEM 5 = M6 NYLOC NUTS (x2).
- ITEM 6 = M6 WASHERS (19mm OUTSIDE DIAMETER) (x2).



Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- TWO 10mm A/F SOCKETS AND WRENCHES.

FITTING INSTRUCTIONS

- FIT ONE OF THE M6 WASHERS AND NUTS TO THE SPINDLE BAR (ITEM No 1) (THE END WITH THE SHORTER THREAD) ENSURING THE NYLOC NUT IS FULLY ENGAGED.
- PLACE EITHER CRASH PROTECTOR (ITEM No 2) ONTO THE SPINDLE BAR SO NUT AND WASHER GOES INTO THE COUNTER BORE.
- NEXT PLACE THE STEPPED SPACER (ITEM No 3) ONTO THE SPINDLE BAR SO THE LARGER DIAMETER SITS AGAINST THE FLAT FACE OF THE CRASH PROTECTOR (ITEM No 2).
- FEED THE ASSEMBLY THROUGH REAR SPINDLE FROM THE LEFT HAND SIDE SO THE SMALLER DIAMETER OF THE SPACER FITS INTO SPINDLE.
- PLACE THE TUBE TYPE SPACER (ITEM No 4) OVER THE ORIGINAL SPINDLE NUT ON THE RIGHT HAND SIDE.
- PLACE THE REMAINING CRASH PROTECTOR OVER THE EXPOSED END OF THE SPINDLE BAR SO IT SITS AGAINST THE TUBE TYPE SPACER JUST FITTED.
- USE THE REMAINING NUT AND WASHER TO SECURE INTO POSITION. DO NOT OVER-TIGHTEN—THE NYLOC NUTS WILL HOLD IT TIGHT.

ISSUE 1 31/10/2012 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com




**Instructions de montage pour SP0044 Protections bras oscillant
HUSQVARNA TR650 STRADA 2012**



LE KIT CONTIENT LES ARTICLES EXPOSES CI-DESSOUS, VERIFIER QUE TOUTES LES PIECES SOIENT PRESENTES AVANT DE PROCEDER AU MONTAGE.

**LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.
LES PIECES PRESENTEES PEUVENT N'ETRE QUE REPRESENTATIVES, AFIN DE FACILITER ET CLARIFIER LES INSTRUCTIONS DE MONTAGE.**

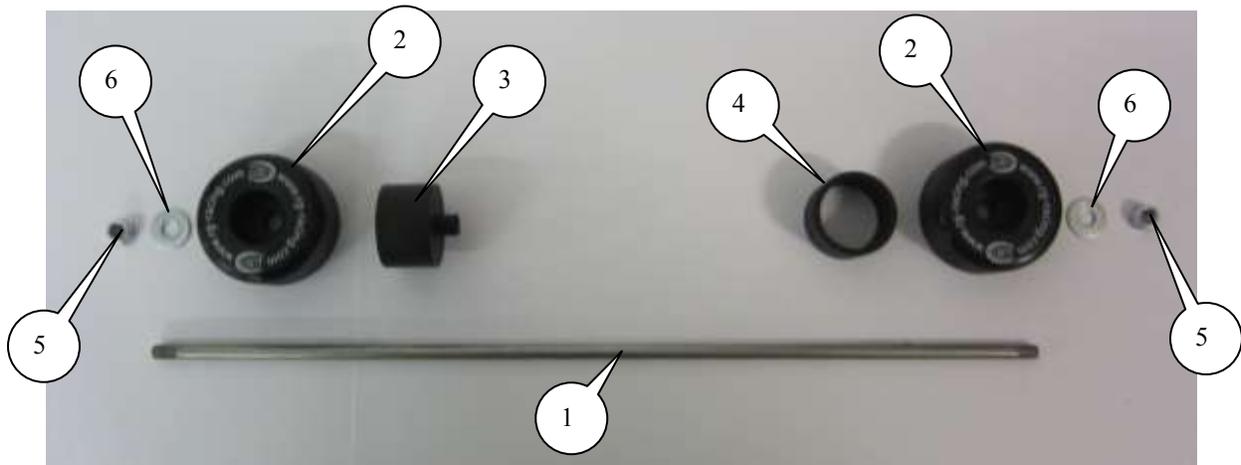

LEGENDE

- ARTICLE 1 = Axe (SB096 Environ 350mm de long) (x1)
- ARTICLE 2 = Protections Crash (B0442 M6 (6mm Diamètre interne)) (x2).
- ARTICLE 3 = Entretoise coté gauche (S0561, 6mm Diamètre interne) (x1).
- ARTICLE 4 = Entretoise coté droit (S0562, Entretoise type tube) (x1).
- ARTICLE 5 = M6 Ecrous en Nyloc (x2).
- ARTICLE 6 = M6 Rondelles (19mm Diamètre externe) (x2).



Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, *ces rondelles doivent être jetées.*

Outils requis

- 2 clés 10mm

Instructions de montage:

- Passer une des rondelles M6 et écrous sur l'axe (Article No 1) (L'extrémité avec le filetage le plus court) en vous assurant que l'écrou en Nyloc soit complètement engagé.
- Placer une des protection crash (Article No 2) sur l'axe de façon à ce que l'écrou et la rondelles aillent dans le contre alésage.
- Ensuite, placez l'entretoise la plus large légèrement plus étagée (Article No 3) sur l'axe de façon à ce que le diamètre le plus large se pose contre la partie plate de la protection crash (Article No 2).
- Passer cet ensemble à travers l'axe arrière du coté gauche de façon à ce que le plus petit diamètre de l'entretoise aille dans l'axe.
- Placez l'entretoise type tube (ARTICLE No 4) autour de l'axe à écrou d'origine du coté droit.
- Placez la protection crash restante autour de l'extrémité de l'axe de façon à ce qu'elle aille contre l'entretoise tout juste installée.
- Utiliser l'écrou restant et la rondelle pour fixer la position. Ne pas trop serrer – les écrous font tenir le tout.

ISSUE 1 31/10/2012 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com