



Installation Instructions for Mustang Two-Piece Seat on 2010-2011 Honda Fury

Stock Seat Removal:


1. Locate and remove two Allen screws from sides of rear seat.



2. At back end of rear seat, pull seat cover away to expose third Allen screw; remove.



3. At back end of front seat, pull seat cover away to expose two mounting screws and remove them. Pull seat up and back to remove from bike.

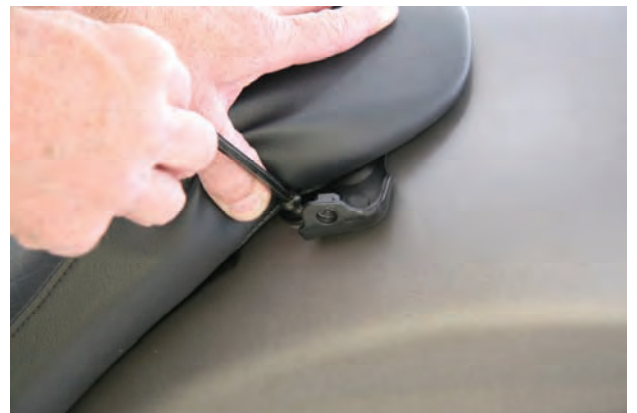

Installation Instructions for Mustang Two-Piece Seat on 2010-2011 Honda Fury

Installation of Mustang Seat:

1. If installing only the Mustang solo (front) seat, insert the solo seat's nose tab into the frame opening just behind the gas tank, above the shock mount. Secure seat with two supplied chromed Allen screws.



2. If also installing the matching Mustang rear seat, secure back of front seat to fender using the two supplied 6mm x 1" long hex head bolts with two spool washers. Spool washers go on top of seat mounting tabs, with two plastic washers placed under mounting tabs against fender.



3. Align forks on front of Mustang rear seat with the grooves in the spools; slide rear seat forward until rear mounting tab aligns with hole in fender.



4. Secure rear seat to the fender using the supplied Allen screw with the plastic washer under the mounting tab against the fender.



Alternate instructions for using stock Honda rear seat behind the Mustang solo seat.

1. Turn stock front seat over and remove the Honda mounting bracket by unscrewing the two Allen screws.



2. Position the stock bracket under the mounting tabs at the back of the Mustang front seat and secure the front seat and bracket to the fender using the stock screws.



3. Installation of the stock rear seat is the reverse of its removal. Install and tighten two side screws.



4. Secure back of rear seat to fender using stock screw.



Installation Instructions for Mustang Two-Piece Seat on 2010-2011 Honda Fury

Enjoy your new Mustang seat.

Mustang seats #79626 and #76281
shown installed on Fury.



Mustang front seat #79626 with stock
Honda rear seat installed on Fury.



These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "[Support](#)".

Ref. part #'s 76280, 76281, 76282, 76283, 79626, 79627, 79628, 79629,
79638, 79639